

ELECTROMAGNETIC BUZZER

IMT09B

FEATURES:

Case: NORYL

Pin: Pins' storage time $\leq$ 5 months
 $\leq$ 75%R.H Electroplating: tin



*This product conforms to
the standard of ROHS*


➤ SPECIFICATIONS

TYPE	UNIT	IMT09B2701P	IMT09B2703P	IMT09B2705P
◆ Min. Sound Output at 10cm	dB	80	86	87
Rated Voltage	V _{0-p}	1.5	3	5
Operating Voltage	V _{0-p}	1~2	2~4	4~6
Resonant Frequency	Hz	2730		
◆ Max. Current Consumption	mA	80	70	
Coil Resistance	Ω	6 ± 1	16 ± 2	40 ± 4
◇ Coil Impedance	Ω	15	35	80
Operating Temperature	°C	-20~+70		
Storage Temperature	°C	-30~+80		
Weight	g	0.7		


◆ Value applying at (rated voltage, 2730 Hz, 1/2 duty square wave)

◇ Value applying at (2730 Hz, sine wave, measuring current 60 μ A)

➤ DIMENSIONS : (Unit: mm)

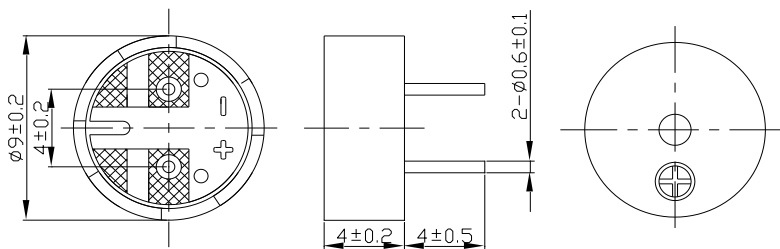

➤ FREQUENCY RESPONSE:

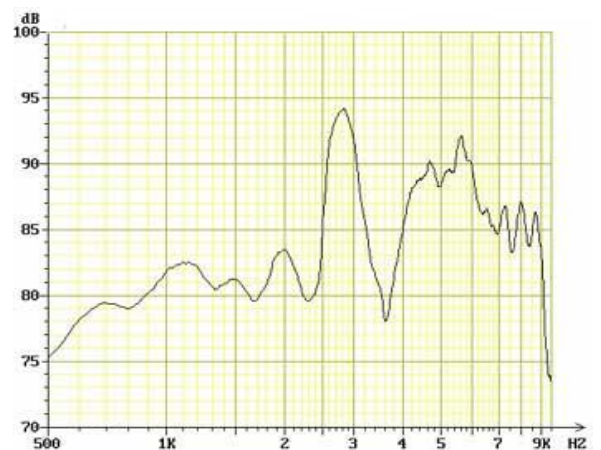

ILOSAM ELECTRONICS CO.,LTD

Address: 906-907 room ,184, Gansan Digital 2Road,Guemchun-Gu,Seoul,Korea

Phone: +82-02-2615-0158 Fax: +82-2-2615-1043

E-mail: ilosamelc@naver.com HOMEPAGE: [Http:// www.ilosam.com](http://www.ilosam.com)