

ELECTROMAGNETIC BUZZER

SM-12C

FEATURES:

Case: NORLY

Pin: Pins' storage time $\leq$ 5 months

$\leq$ 75% R.H Electroplating: tin



This product conforms to the standard of ROHS


➤ SPECIFICATIONS

TYPE	UNIT	SM-1203C	SM-1205C	SM-1212C
◆ Min. Sound Output at 10cm	dB	85	88	
Rated Voltage	V _{0-p}	3	5	12
Operating Voltage	V _{0-p}	2~5	3~7	8~15
◆ Resonant Frequency	Hz	2400 ± 50		
◆ Max. Current Consumption	mA	30		
Operating Temperature	°C	-20 ~ +70		
Storage Temperature	°C	-30 ~ +80		
Weight	g	1		


◆ Value applying at (rated voltage, 2400 Hz, 1/2 duty square wave)

◇ Value applying at (2400 Hz, sine wave, measuring current 60μA)

➤ DIMENSIONS : (Unit: mm)

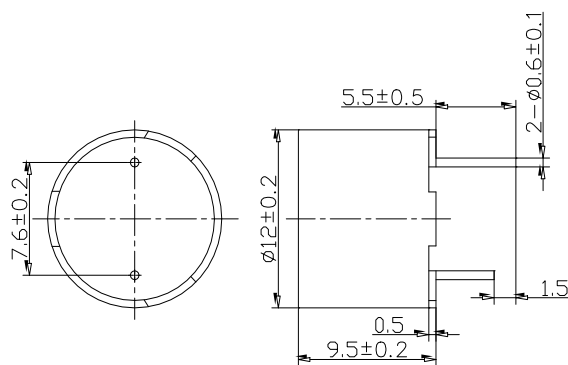

➤ FREQUENCY RESPONSE:

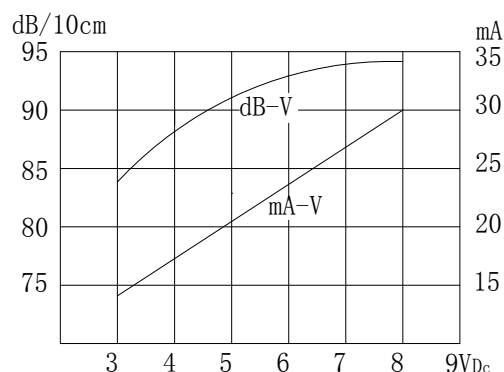

ILOSAM ELECTRONICS CO.,LTD

Address: 906-907 room ,184, Gansan Digital 2Road,Guemchun-Gu,Seoul,Korea

Phone: +82-02-2615-0158 Fax: +82-2-2615-1043

E-mail: ilosamelc@naver.com HOMEPAGE: [Http:// www.ilosam.com](http://www.ilosam.com)