

MECHANICAL BUZZER

XCMX33A0424W-2

FEATURES:

Case: ABS

Lead wire terminal storage time ≤ 5 months $\leq$

75% R.H Electroplating: tin WIRE: UL1007, AWG26




This product conforms to the standard of ROHS

> SPECIFICATIONS

TYPE	UNIT	XCMX33A0424W-2
◆ Min. Sound Output at 10cm	dB	75
Rated Voltage	V _{0-p}	24
Operating Voltage	V _{0-p}	20~28
◆ Resonant Frequency	Hz	400 $\pm$ 100
◆ Max. Current Consumption	mA	30
Tone Nature		Continuous
Operating Temperature	℃	-20~+70
Storage Temperature	℃	-30~+80
Weight	g	8.5

◆ Value applying at rated voltage

> DIMENSIONS : (Unit: mm)

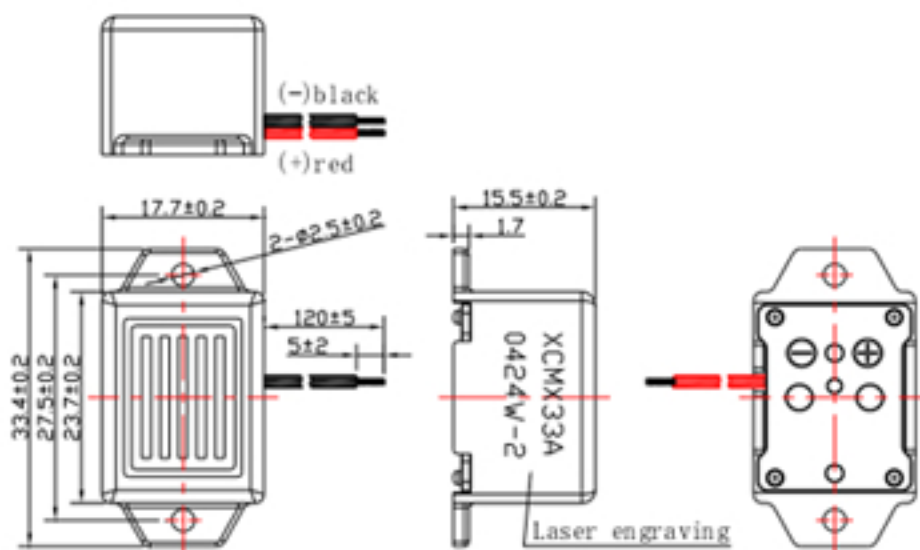

> FREQUENCY RESPONSE:

