


Features

- ✦ Sub-miniature, light-weight, high level Switching power (30A DC 12V)
- ✦ Contact arrangement : 1 Form A, 1 Form C
- ✦ Low cost
- ✦ Automobile use

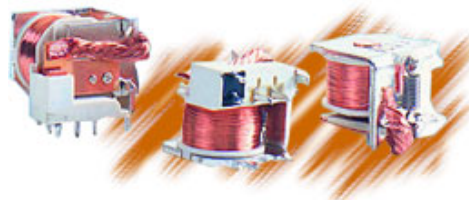

Ordering Information

D A R 2		12	A	D
Model	Coil voltage	Contact arrangement		Cover type
Automotive Relay	12, 24	A : 1 Form A C : 1 Form C		Nil : Open type D : Cover type

Coil Ratings

Coil data (at 20°C)

Item voltage (VDC)	Coil resistance (Ω±10%)	Rated Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Power Consumption (W)
			(% of Rated voltage)			
12	90	134	80 max.	10 min.	110 max.	Approx 1.6W
24	360	67				

Contact Ratings

Contact specification Load Arrangement	NO Contact		NC Contact		Min Permissible Load
	Resistive Load (Cosφ = 1)	Inductive Load (Cosφ = 0.4 L/R=7ms)	Resistive Load (Cosφ = 1)	Inductive Load (Cosφ = 0.4 L/R=7ms)	
1 Form A	30A	12A	-	-	DC 5V 100mA
1 Form C	20A	10A	15A	7A	