


Features


- 20A switching capabilities
- SPDT configurations
- Subminiature, standard PC layout
- High resistance to vibration and shock
- Low power consumption 0.6W only

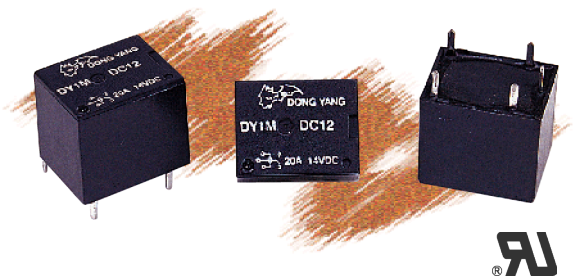

Typical Applications

- Automotive
Power window, Car antenna, Door lock, Car stereo power antenna, Power sunroof, etc.

Ordering Information

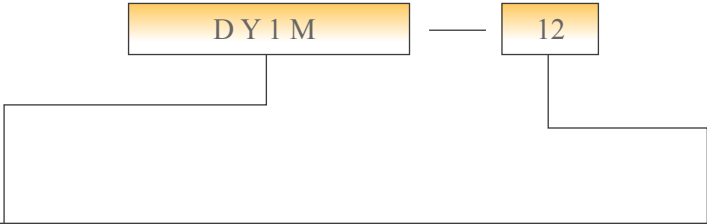

Model	Coil voltage(VDC)
Subminiature Automotive Relay	4.5, 5, 6, 9, 12, 18, 24

Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	max. voltage	Coil power dissipation
			% of nominal voltage			
6	60	100.0	65 max.	7 min.	130 max.	0.6W
9	135	66.7				
10	180	55.6				
12	240	50.0				

Note : The rated current and resistance are measured at a coil temperature of 20 °C with tolerances of : $\pm 10\%$