




Features


- Low profile, light weght.
- Two types of contact.  
(General type : 5A switching.  
High power type : 10A switching)
- UL Recognized

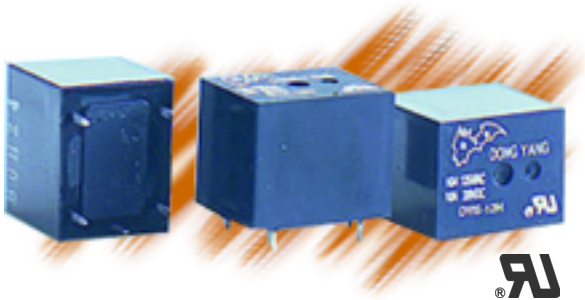

Typical Applications

- Automobiles   Computers   Timers   Sun switches   Refrigerator
- Thermo controllers   Convection heaters   Industrial equipment, etc

Ordering Information

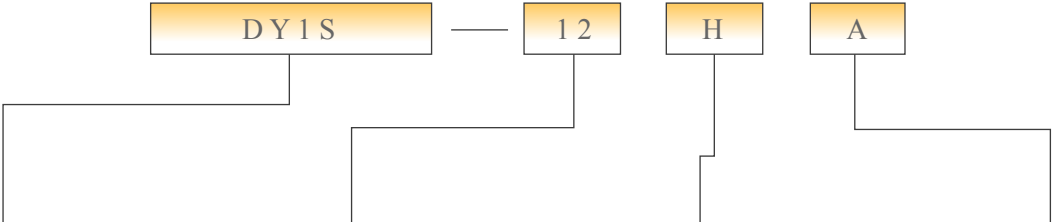

Model	Coil voltage(VDC)	Contact ratings	Contact form
Subminiature PC Board Relay	3, 5, 6, 9, 12, 24, 48	Nil : General type(5A) H : High power(10A)	Nil : Form C A : Form A

Coil Ratings

Items Nominal voltage(VDC)	Coil resistance ( Ω± 10%)	Nominal current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
			% of nominal voltage			
3	25	120	80 Max.	10 Min.	130 Max.	Approx. 0.36W
5	70	71.5				
6	100	60				
9	225	40				
12	400	30				
24	1600	15				
48	6400	7.5				

Note : The rated current and resistance are measured at a coil temperature of 20 C° with tolerances of :  $\pm 10\%$