

Features


- Smallest size (18.2 x 10.0 x 15.0) at 5A switching capacity relay for high density P.C. board mounting technique
- 1 Form A (SPST-NO) contact arrangement
- Surge resistiveness of 4,000V
- Sealing construction



Typical Applications

- TV, MONITOR
- AUDIO
- Office machines

Ordering Information

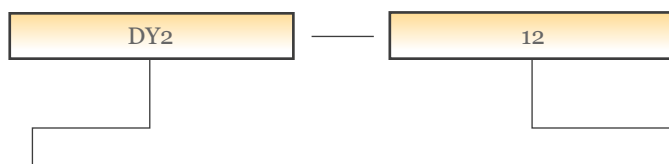

Model	Coil voltage (VDC)
Subminiature PC Board Relay	3, 5, 6, 9, 12, 24

Coil Ratings

Items Nomal Voltage (VDC)	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up Voltage	Drop-out Volage	Max. Voltage	Coil Power Dissipation
			% of nominal voltage			
3	45	67	75 max.	5 min.	130 max.	Approx. 0.20W
5	125	40				
6	180	33.3				
9	400	22.5				
12	720	16.7				
24	2,800	8.16				

Note : The rated current and resistance are measured at a coil temperature of 20°C with tolerances of $\pm 10\%$