

Features


- Plastic sealed type is for washing procedure.
- Dielectric strength : 5,000VAC.
- 2 Pole 5A, 1 Pole 10A & 16A
- UL approval



Typical Applications

- Microwave ovens
- Air conditioner
- TV sets
- Copiers
- Facsimiles
- Stereo equipments
- Refrigerators
- Temperature controllers, etc.

Ordering Information

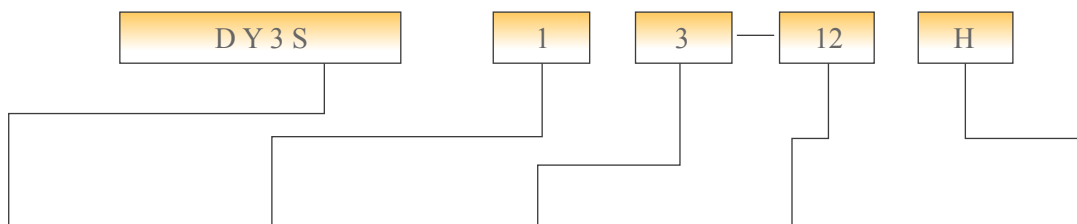

Model	No. of poles	Contact form	Coil voltage(VDC)	Contact ratings
Miniature High-Power Relay	1 : Single Pole 2 : Double Pole	1 : 1 Form C 3 : 1 Form A	5, 6, 9, 12, 18, 24, 48	Nil : Standard type (10A) H : High capacity type (16A), Single pole only

Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance (Ω ±10%)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
			% of nominal voltage			
3	17	176.5	80 Max.	5 Min.	110 Max.	0.54W
5	50	100.0				
6	68	88.2				
9	155	58.1				
12	270	44.4				
24	1,100	21.8				
48	4,400	10.9				

Note : The rated current and resistance are measured at a coil temperature of 20 °C with tolerances of : $\pm 10\%$