


Features


- High sensitivity : 150mW
- 1 pole configurations
- Small size at 12.5L X 7.5W X 10H (mm)
- Sealed types available

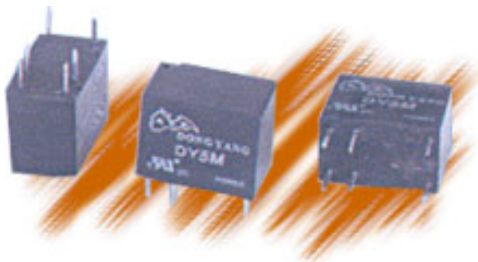

Typical Applications

- Telecommunications equipment

Ordering Information

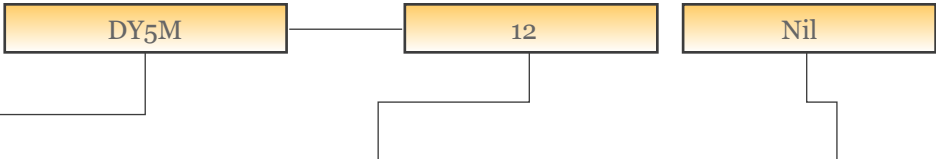

Model	Coil voltage (VCD)	Contact ratings
LOW SIGNAL RELAY 1 POLE 1A PC BOARD	1.5, 3, 5, 6, 9, 12, 24	Nil : 200mW S : 150mW

Coil Ratings

Type	Items	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
	Nominal Voltage(VCD)			% of nominal voltage			
Nil	1.5	11.3	132.7	80 Max.	10 Min.	120 Max.	Approx. 0.2W
	3	45	66.7				
	5	125	40.0				
	6	180	33.3				
	9	405	22.2				
	12	720	16.7				
	24	2,880	8.3				
S	1.5	15	100	80 Max.	10 Min.	120 Max.	Approx. 0.15W
	3	60	50.0				
	5	167	29.9				
	6	240	25.0				
	9	540	16.7				
	12	960	12.5				
	24	3,840	6.25				

NOTE : The rated current and resistance are measured at a coil temperature of 20℃ with tolerances of ±10%