


Features


- Low cost, high reliability
- SPST-NO(1a) or SPDT(1c) contact
- High inrush current capability
- Plastic sealed without vent hole

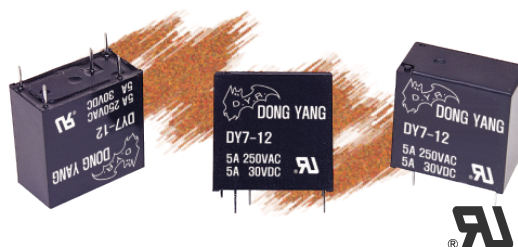

Typical Applications

- Temperature controllers
- Facsimiles
- TV sets
- Air conditioners, etc.

Ordering Information

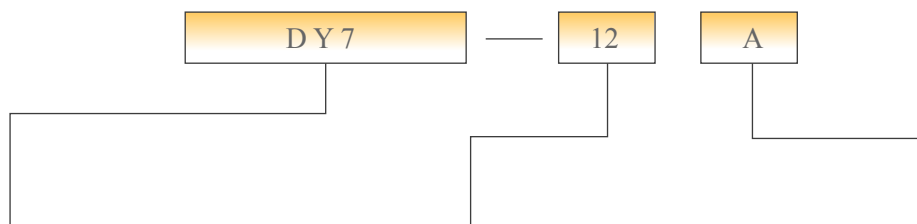

Model	Coil voltage(VDC)	Contact ratings
Subminiature Intermediate Power Relay	3, 5, 6, 9, 12, 18, 24, 48	Nil : 1 Form C A : 1 Form A

Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
			% of nominal voltage			
3	36	83.3	75 Max.	5 Min.	130 Max.	0.25W
5	100	50.0				
6	145	41.4				
9	325	27.7				
12	575	20.9				
18	1,300	13.8				
24	2,310	10.4				
48	9,220	5.2				

Note : The rated current and resistance are measured at a coil temperature of 20 °C with tolerances of : $\pm 10\%$