


Features


- Extremely small footprint utilizing PCB area
- Provides 10-KV impulse withstand voltage (coil to contact)
- Highly efficient magnetic circuit for sensitivity (200mW)
- Sealed type

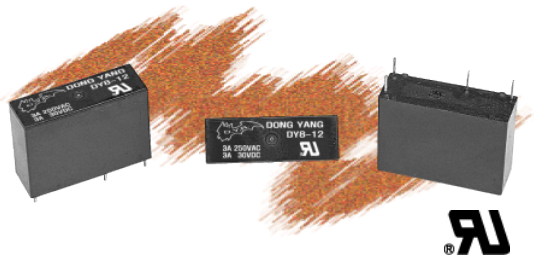

Typical Applications

- Office machines
- Audio equipment
- Air conditioner
- PLC, etc.

Ordering Information

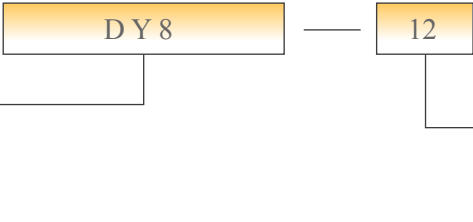

Model	Coil voltage(VDC)
Subminiature Intermediate Power Relay	4.5, 5, 6, 9, 12, 18, 24

Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance (Ω ±10%)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
			% of nominal voltage			
4.5	101	44.6	75 Max.	5 Min.	110 Max.	0.2W
5	125	40.0				
6	180	33.3				
9	405	22.2				
12	720	16.7				
18	1,620	11.1				
24	2,880	8.3				

Note : The rated current and resistance are measured at a coil temperature of 20 C with tolerances of : $\pm 10\%$