

Features


- Heavy current up to 16A
- SPST-NO(1a) contact
- Nominal power 200mA
- High sensitivity in small package



Typical Applications

- Home appliances
- Air conditioner
- Heater
- Industrial control, etc.

Ordering Information

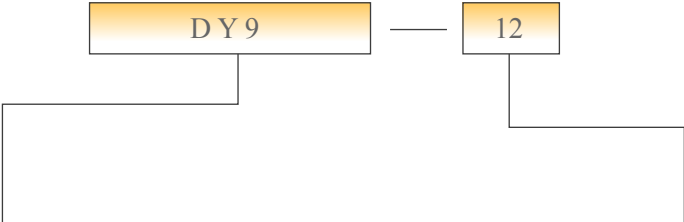

Model	Coil voltage(VDC)
Subminiature High-Power Relay	5, 6, 9, 12, 18, 24, 48

Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance (Ω ±10%)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	Max. voltage	Coil power dissipation
			% of nominal voltage			
5□	125	40.0	70 Max.	10 Min.	110 Max.	0.2W
6□	180	33.3				
9□	405	22.2				
12□	720	16.7				
18□	1,620	11.1				
24□	2,880	8.3				
48	11,520	4.2				

Note : The rated current and resistance are measured at a coil temperature of 20 °C with tolerances of : $\pm 10\%$