




Features

- Low cost, high reliability
- Flux-tight or sealed package is available
- SPST-NO(1a) or SPDT(1c) contact
- All plastic materials : 94V-0
- Safety-oriented between coil and contacts terminal
- UL, CUL, TÜV

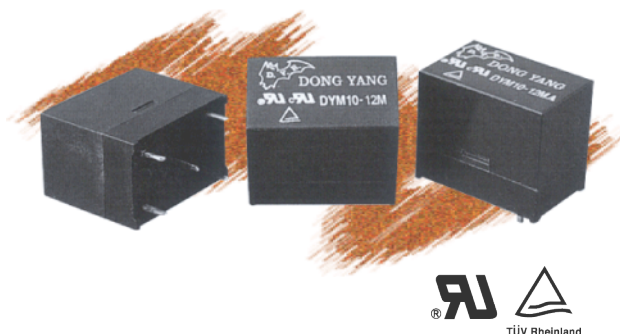


Typical Applications

- Home appliance (Oven, Range, Heater, Dryer, Air Conditioner etc.)
- Automotive
- Programmable controller



Ordering Information

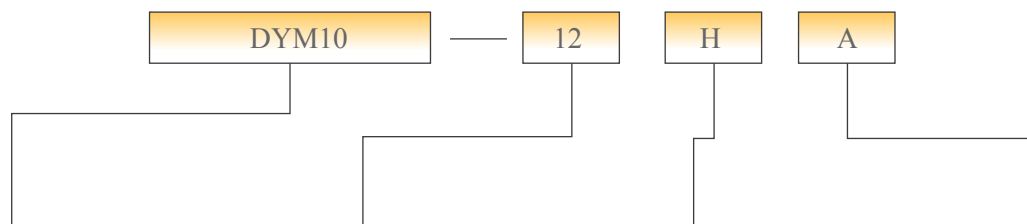

Model	Coil voltage(VDC)	Contact current	Contact form
Subminiature High-Power Relay	5, 6, 9, 12, 24, 48	H : 10A 125VAC M : 5A 277VAC L : 3A 250VAC	Nil : SPDT (1c) A : SPST (1a)



Coil Ratings

Items Nominal Voltage(VDC)	Coil Resistance ($\Omega \pm 10\%$)	Nominal Current (mA)	Pick-up voltage	Drop-out voltage	max. voltage	Coil power dissipation
			% of nominal voltage			
5	62.	80	80 max.	10 min.	130 max.	0.4W
6	590	67				
9	202	44				
12	360	33				
24	1,440	17				
48	5,760	8.3				

Note : The rated current and resistance are measured at a coil temperature of 20 °C with tolerances of : $\pm 10\%$