

SPECIFICATION

49F/49FA

RELAY SOCKET


CHARACTERISTICS

Ambient temperature	-40 °C to + 70 °C
Rated voltage	300VAC
Rated current	10A (per pole)
Insulation voltage (Min.)	5000VAC
Protection degree DIN40050	IP20
Socket material	PBT V0 (UL)
Contacts spring material	QSn6.5-0.1
Retainer	non-available
White plastic tag	non-available
Applicable relay type	49F type is suitable for JZC-49F / 49FA type is suitable for JZC-49FA

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit : mm

Outline Dimensions

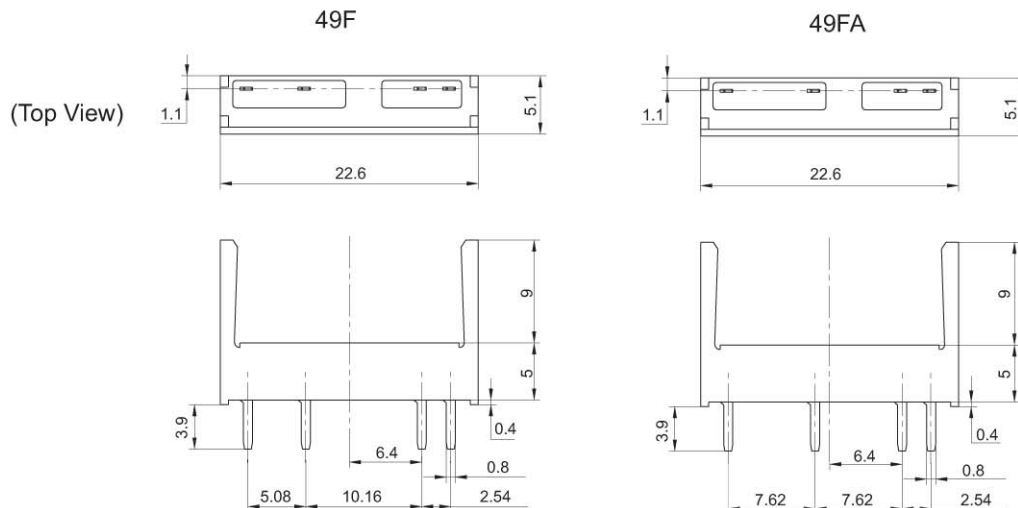

PCB Layout

